
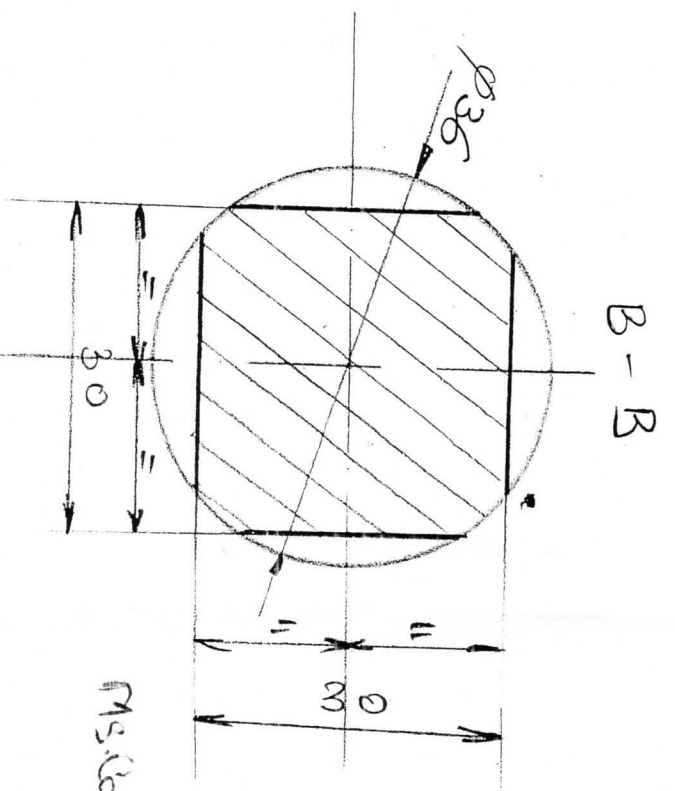
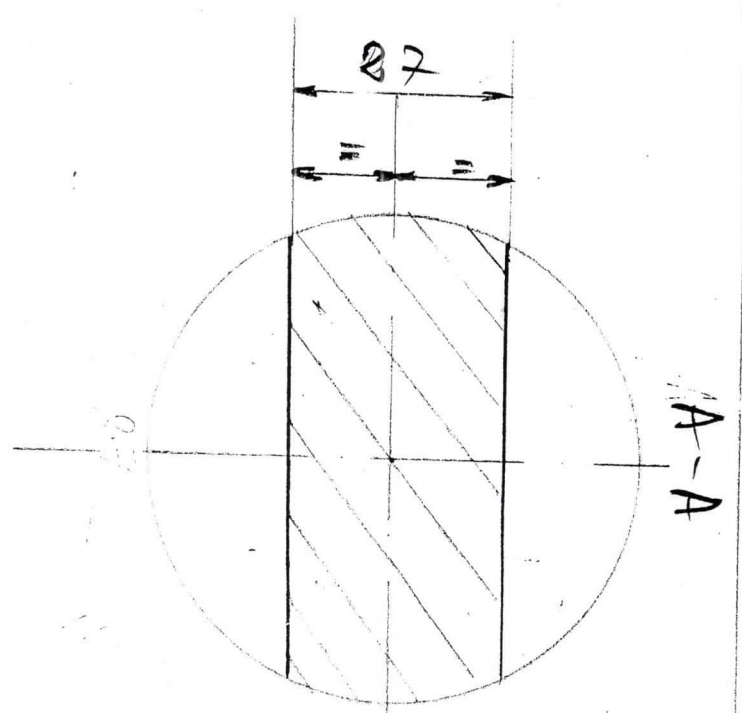


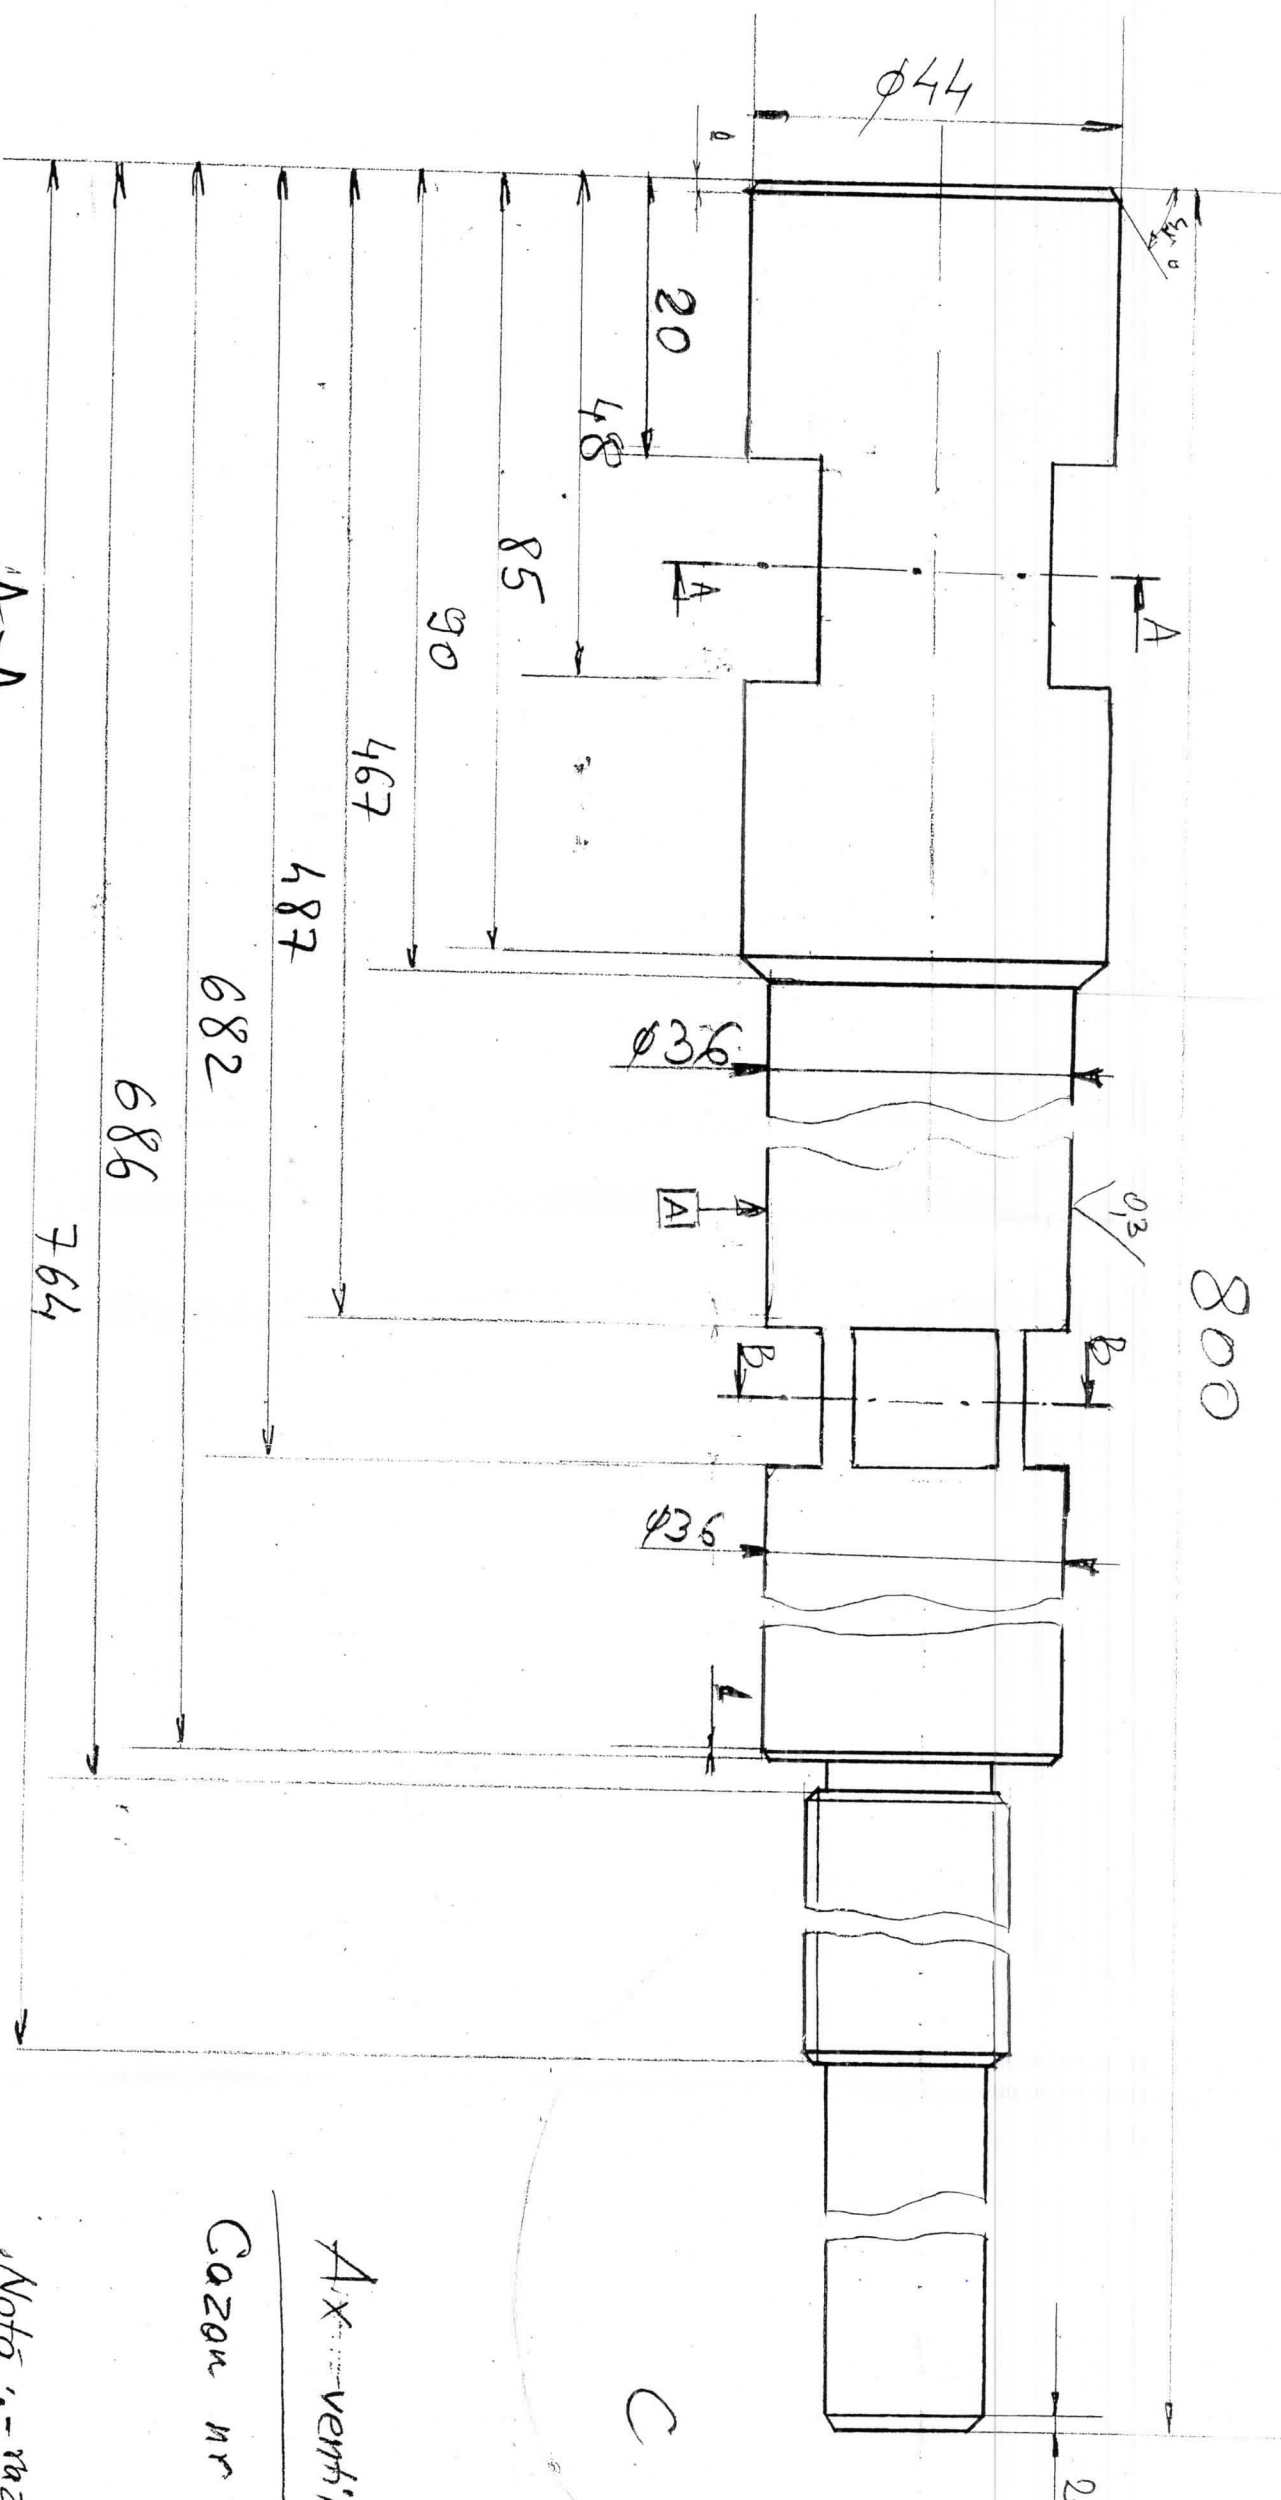

Ax-ventil reglat

Cazan nr 1 Grozavesti

Nota: - nazele de racordare
necotate vor fi realizate

la R 1,5 ÷ 2 mm

- suprafata A tratata cu

tr. termic superficial in

Material:

38 Mo Cr Al 09

35 Mo Cr 165


34 Mo Cr 11 AS

Nr. bucati: 2 buc.


Ms. Cistace Fl. in

2007

Detailul C
AX VENTIL REGLAT. 41

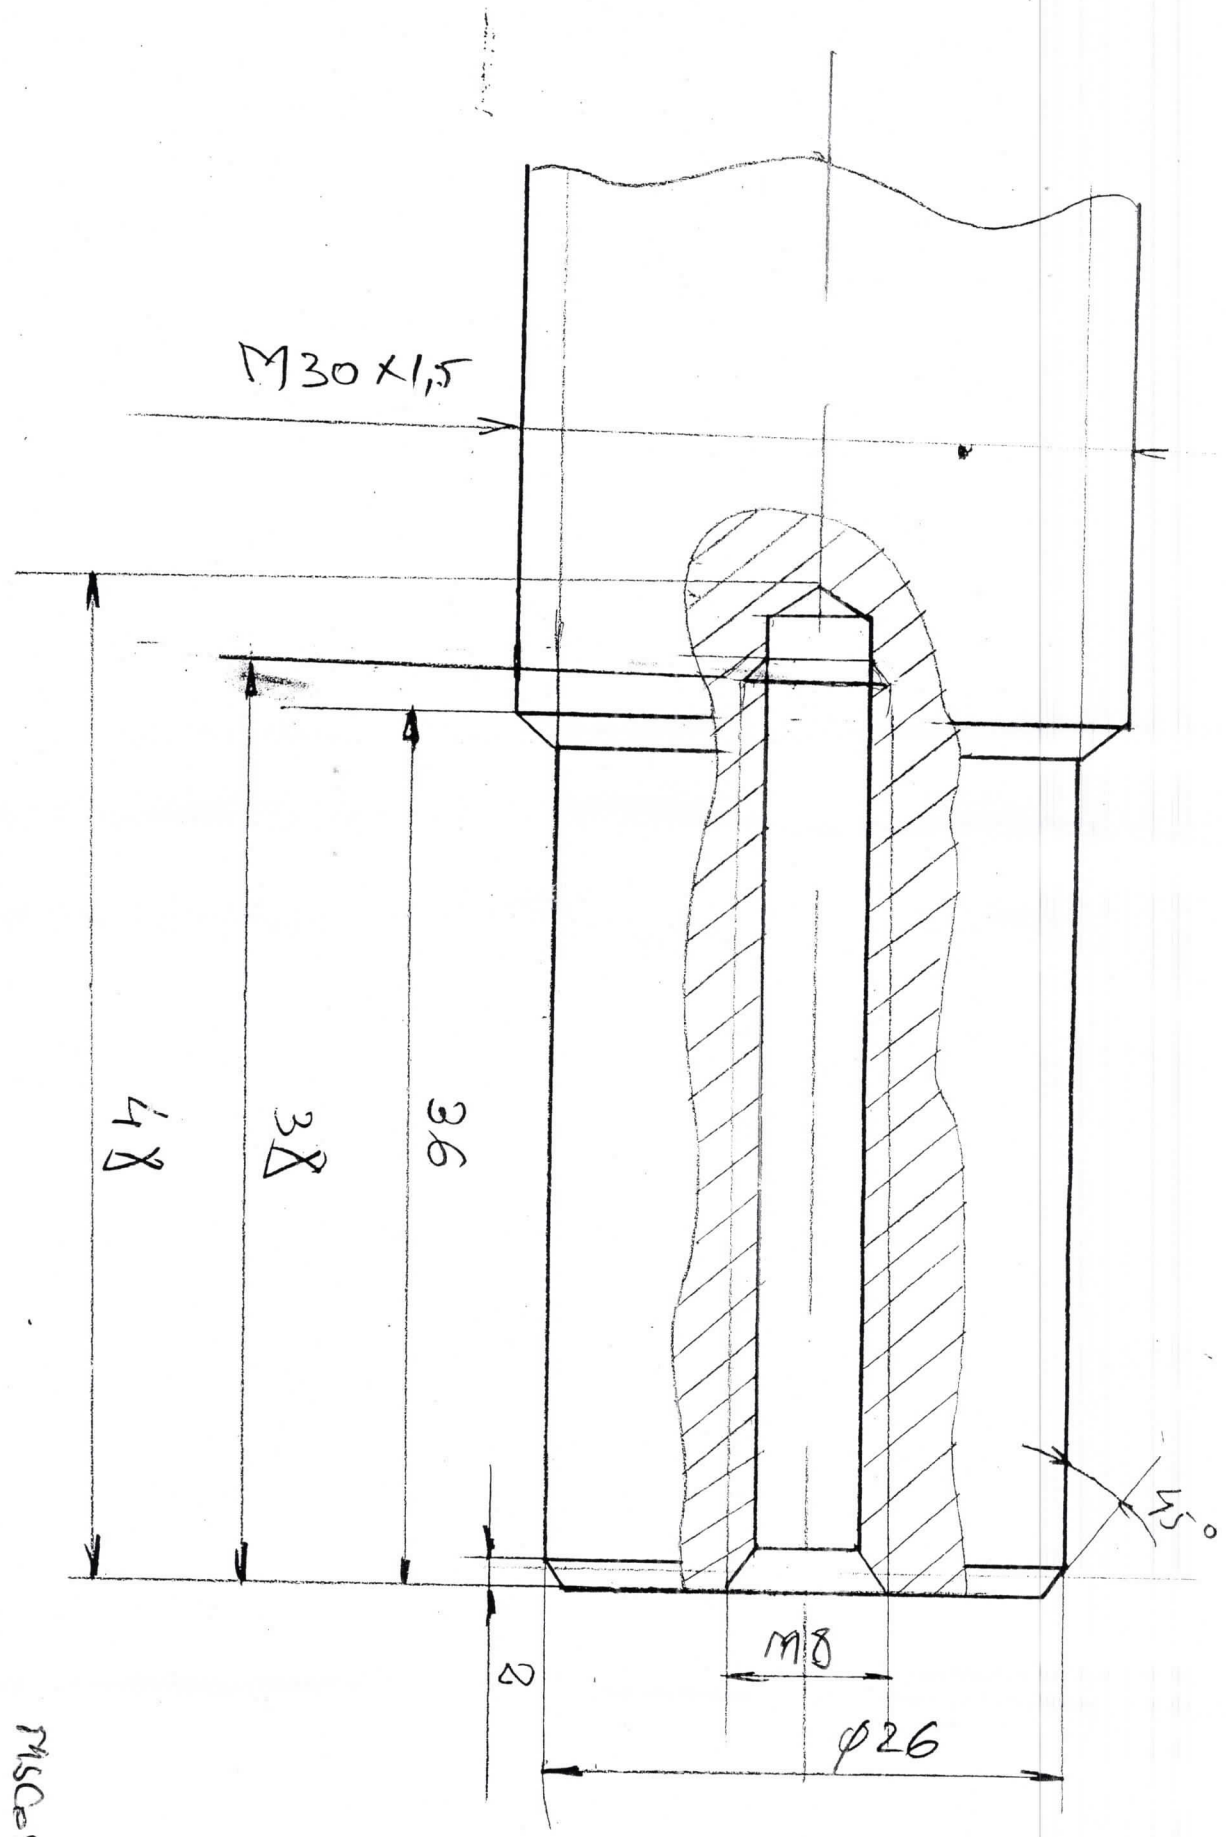


Miscelaneu
2017

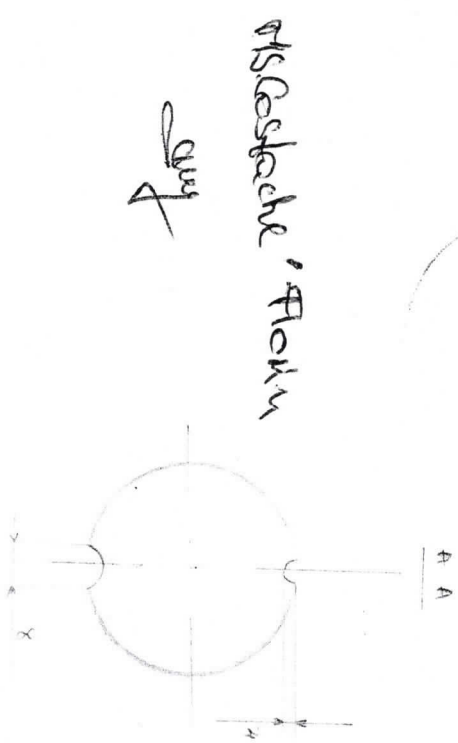

W.S. Gostack, Flom

7

Bucse ventii reglaj 122
Cazan nr 1 Grozăvești

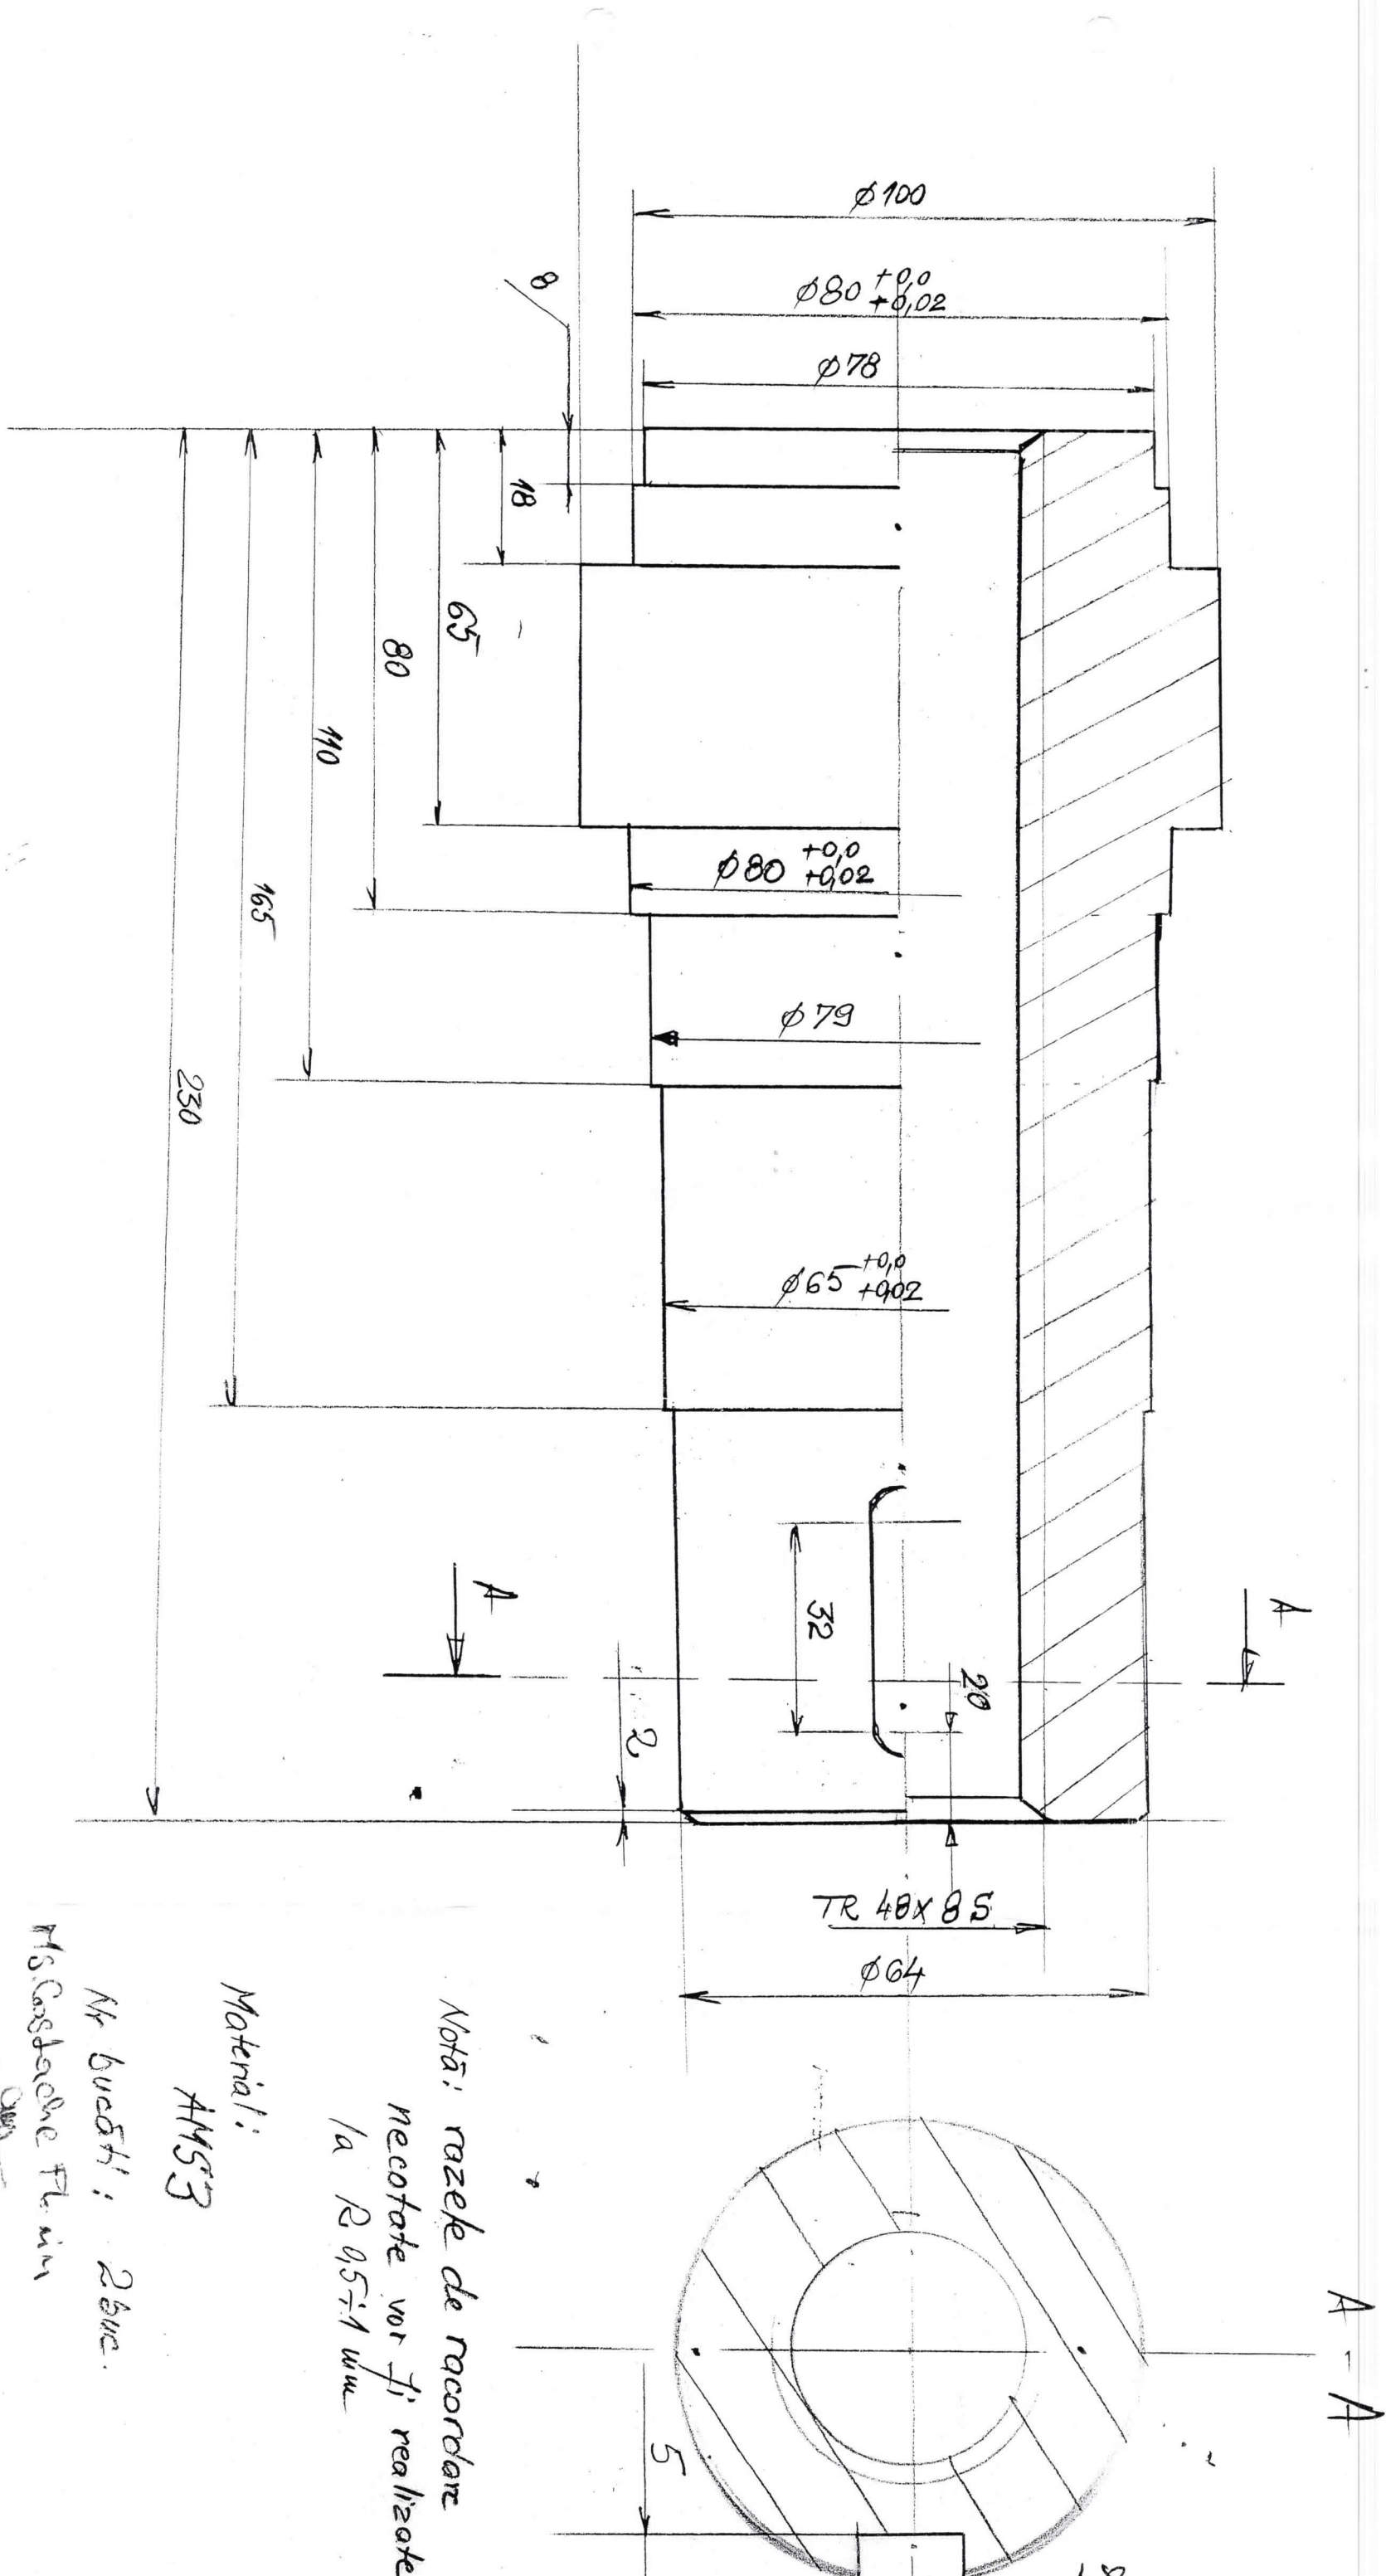

Notă: razele de racordare
necotate vor fi realizate
la $R 0,5 \pm 1 \text{ mm}$

Material:

AMS3

Nr bucsă: 2 buc.

M. Costache Fl. in

2017